



PLASTOL 6420

MID/HIGH RANGE - WATER REDUCING ADMIXTURE

DESCRIPTION

PLASTOL 6420 is a mid/high range water reducing and plasticizing polycarboxylate based admixture for concrete. PLASTOL 6420 shows improved finishing characteristics when compared to other commonly used Type A (typically 5 - 6% water reduction) or Type F (typically 12 - 15% water reduction) admixtures. This mid range approach to water reducing admixtures allows for a wide range of usable dosage rates for a broad application spectrum. PLASTOL 6420 contains no added chlorides or chemicals known to promote the corrosion of steel.

PRIMARY APPLICATIONS

- Ready mix concrete
- Precast concrete
- Cast in place
- Self-consolidating concrete (SCC)
- Concrete mixtures utilizing Fly Ash, Slag or other natural pozzolans

FEATURES/BENEFITS

Plastic Concrete

- Improves finishability
- Improves workability
- Reduces water requirement
- Improves setting times
- Superior slump retention
- Improved air consistency



Hardened Concrete

- Increases early and late age strengths
- Reduces permeability
- Increases durability

TECHNICAL INFORMATION

The following test results were achieved using typical ASTM C 494 mix design requirements, 517 lb/yd³ (307 kg/m³) cement content and similar (± 0.5)% air content.

These results were obtained under laboratory conditions with materials and mix designs meeting the specifications of ASTM C 494. Changes in materials and mix designs can affect the dosage response of PLASTOL 6420.

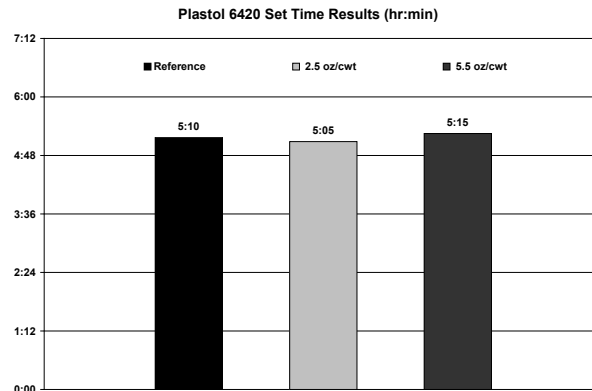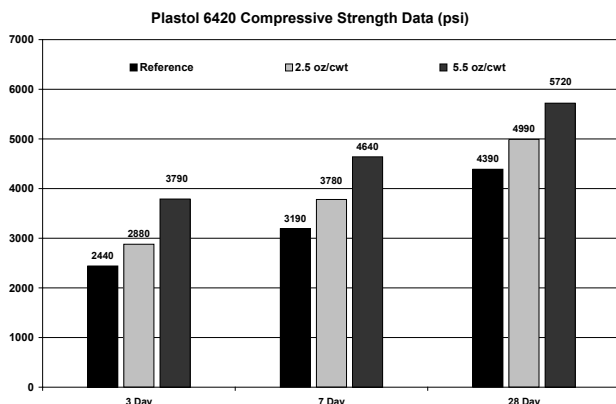

PACKAGING

PLASTOL 6420 is packaged in bulk, 275 gal (1041 L) totes, 55 gal (208 L) drums, and 5 gal (18.9 L) pails.

SHELF LIFE

1 year in original, unopened container.

SPECIFICATIONS/COMPLIANCES

PLASTOL 6420 meets or exceeds the requirements of:

- ASTM C 494, Type A and Type F
- ASTM C 1017 as a Type I admixture
- AASHTO M 194
- ANSI/NSF STD 61 registered

DIRECTIONS FOR USE

PLASTOL 6420 has a recommended dosage range of 2 to 10 oz per 100 lbs (130 to 650 mL per 100 kg) of cementitious material.

Dosage recommendations depend on the characteristics of the materials being used in the mix design. Higher dosages are acceptable with prior testing and confirmation of the desired performance with specific materials used.

Dosages of PLASTOL 6420 to make SCC will vary depending on mixture design. Trial mixtures should be run to verify plastic and hardened performance with local materials.

PLASTOL 6420 can be added to the initial batch water or directly on the freshly batched concrete and mixed for approximately 5 minutes or 70 revolutions. However, better results have been observed dispensing directly on the freshly batched concrete.

PLASTOL 6420 should not come in contact with dry cement or other admixtures until they are mixed with the concrete batch. Field testing is strongly recommended to optimize dosage range and performance expectations with local materials. PLASTOL 6420 is compatible with other Euclid Chemical admixtures including air-entraining agents, accelerators, most water reducers, retarders, shrinkage reducers, corrosion inhibitors, viscosity modifiers, and microsilica; however, each material should be added to the concrete separately.

PRECAUTIONS/LIMITATIONS

- Care should be taken to maintain PLASTOL 6420 above freezing.
- Never agitate with air.
- Add to concrete mix independent of other admixtures.
- In all cases, consult the Safety Data Sheet before use.

Rev. 08.19

WARRANTY: The Euclid Chemical Company ("Euclid") solely and expressly warrants that its products shall be free from defects in materials and workmanship for one (1) year from the date of purchase. Unless authorized in writing by an officer of Euclid, no other representations or statements made by Euclid or its representatives, in writing or orally, shall alter this warranty. EUCLID MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, AS TO THE MERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Euclid product fails to conform with this warranty, Euclid will replace the product at no cost to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Euclid does not authorize anyone on its behalf to make any written or oral statements which in any way alter Euclid's installation information or instructions in its product literature or on its packaging labels. Any installation of Euclid products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Euclid's products for the Buyer's intended purposes.